




JDX型异径橡胶接头 JDX type reducing rubber joint

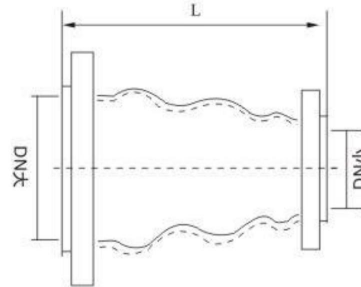

主要连接尺寸 Main connection dimensions

公称通径 Nominal diameter DN, XDN ₂	长度 Length L (mm)	轴向位移 Axial displacement		横向位移 Lateral displacement (mm)	偏转角度 Deflexion angle ($\alpha + \alpha_2$) ^o
		伸长 Extension	压缩 Compression		
50x32	180	20	30	45	35°
50x40	180	20	30	45	35°
65x40	180	20	30	45	35°
65x50	180	20	30	45	35°
80x40	180	20	30	45	35°
80x50	180	20	30	45	35°
80x65	180	20	30	45	35°
100x40	180	20	30	45	35°
100x50	180	20	30	45	35°
100x65	180	22	30	45	35°
100x80	180	22	30	45	35°
125x50	200	22	30	45	35°
125x65	200	22	30	45	35°
125x80	200	22	30	45	35°
125x100	200	22	30	45	35°
150x50	200	22	30	45	35°
150x65	200	22	30	45	35°
150x80	200	22	30	45	35°
150x100	200	22	30	45	35°
150x125	200	22	30	45	35°
200x80	200	22	30	40	30°
200x100	200	22	30	40	30°
200x125	200	25	30	40	30°
200x150	200	25	35	40	30°

公称通径 Nominal diameter DN, XDN ₂	长度 Length L (mm)	轴向位移 Axial displacement		横向位移 Lateral displacement (mm)	偏转角度 Deflexion angle ($\alpha + \alpha_2$) ^o
		伸长 Extension	压缩 Compression		
250x125	220	25	35	40	30°
250x150	220	25	35	40	30°
250x200	220	25	35	40	30°
300x125	220	25	35	40	30°
300x150	220	25	35	40	30°
300x200	220	25	35	40	30°
300x250	220	25	35	40	30°
350x150	240	25	35	40	30°
350x200	240	28	38	35	26°
350x250	240	28	38	35	26°
350x300	240	25	35	40	30°
400x200	240	25	35	40	30°
400x250	240	28	38	40	30°
400x300	240	28	38	40	30°
400x350	240	28	38	40	30°
450x300	240	28	38	40	30°
450x350	240	28	38	40	30°
450x400	240	28	38	40	30°
500x350	240	28	38	40	30°
500x400	240	28	38	40	30°
500x450	240	28	38	40	30°
600x400	240	28	38	40	30°
600x450	240	28	38	40	30°
600x500	240	28	38	40	30°

注：DN200以上接头，高压、高层建筑使用，管道必须有固定支撑或固定托架，否则产品必须有防拉脱装置(产品实际轴向力<反支撑力)。

Note: The joints above DN200 used in high pressure and high building, anti-pull-off device should be installed if the pipe has no fixed stay or fixed bracket (actual axial force of the product is less than anti-supporting force)